How to assemble your « one line flag out » set with your old bar?







1) Hereunder is what you get in your « one line flag out » set.




2) Take your old bar (2017 or before) and remove :

- the ring from the Life Line
- The Depower Line from the QR by removing the pin (4x20mm), with help of some pliers, or a screwdriver (both not included).



3) Keep only your old Bar-tube with Floaters and rear Flying Lines.

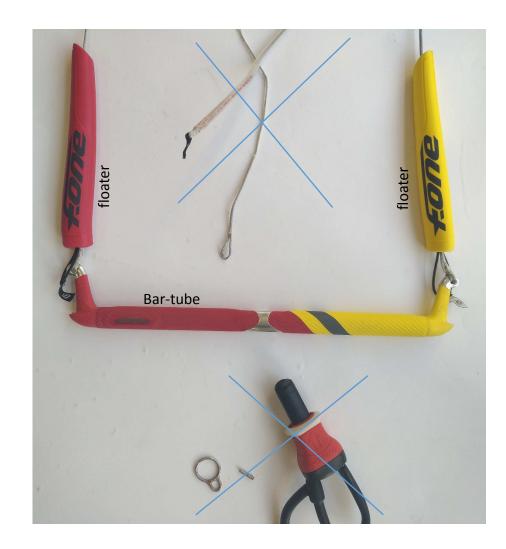




4) Take your new QR and with help of a 2,5mm Allen key (not included), remove the small screw + washer embeded into the Line Twister.



5) Remove the Line Twister, and the pin (5x22mm) that is into it (no need of any particular tool).



6) Take your new Depower Line and Life Line, and pass it through the hole of your old bar.

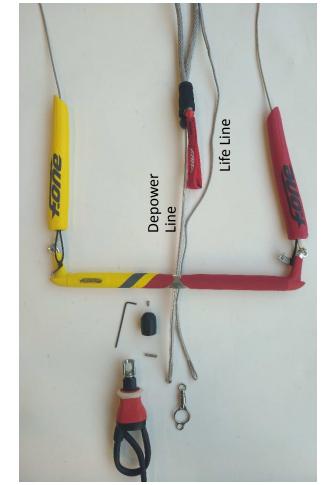

7) Pass your new Depower Line and Life Line through the 2 holes of the Line Twister, as shown below : Depower Line in the center hole.





8) Pass your new Life Line through the QR.



9) Put your new pin (5x22) back into the QR, but through the Depower Line hole.



WARNING :

The Life Line has to pass in front of the pin !






10) Put the Line Twister back onto the QR, and don't forget to put the screw back in his place (please don't screw it too hard).



11) Put the Life Line's swivel at the end of the Life Line, as shown below.

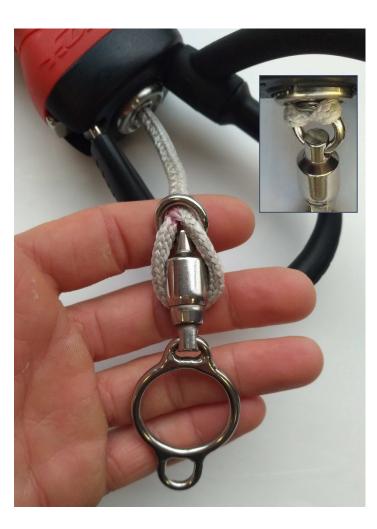



Thank you

